


Industrial Ethernet cables Profinet

S PN 667

Profinet cable type C, continuously flexible with UL recognition, CSA approval

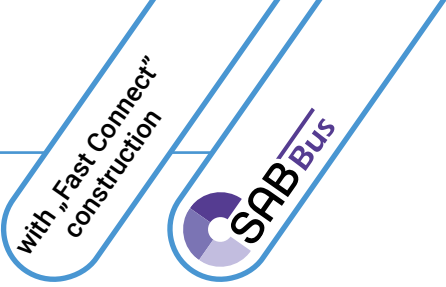

21198 80°C 300V CSA AWM I/II A/B 80°C 300V FT2 CE



marking example:

SAB BRÜCKSKES · D-VIERSEN · S PN 667 Industrial Ethernet FC Cat 5 type C 2x2x22AWG AWM Style 21198 80°C 300V CSA AWM I/II A/B 80°C 300V FT2 CE

Construction:	
Conductor:	tinned copper strands, 7 wires
Insulation:	special polymer
Colour code:	blue, yellow, white, orange
Stranding:	in layers
Wrapping:	PETP-foil
Inner sheath:	thermoplastic material
Screen:	alu foil and tinned copper braiding
Wrapping:	non-woven tape
Sheath material:	PUR
Sheath colour:	green (similar RAL 6018)

Technical data:	
Peak operating voltage:	max. 350 V
Voltage UL/CSA:	300 V
Testing voltage:	core/core 2000 V core/screen 2000 V
Min. bending radius	
fixed laying:	5 x d
flexible application:	10 x d
continuously flexible:	15 x d
Temperature range	UL/CSA: up to +80 °C
fixed laying:	-40/+70 °C
flexible application:	-40/+70 °C
Halogen-free:	acc. to IEC 60754-1 + VDE 0482-754-1
Oil resistance:	TMPU acc. to EN 50363-10-2 + VDE 0207-363-10-2
Characteristic impedance:	100Ω ± 5Ω, fulfils the electrical and transmission requirements with high frequency acc. to EN 50288-2-2 + VDE 0819-2-2 (CAT 5 acc. to EN 50173)
UL Style:	21198
Application:	suitable for EtherCAT and EtherNET/IP applications
Absence of harmful substances:	acc. to RoHS directive of the European Union see chapter N „Technical data“

item no.	type	dimension	max. core-ø mm	outer-ø ± 10% mm	copper figure kg/km	cable weight ≈ kg/km	ohmic resistance at 20°C acc. to VDE 0812 max. Ω/km
06672202	S PN 667	2 x 2 x 22 AWG	1,55	6,5	33,8	60	58,8

Other dimensions and colours are possible on request.

For extreme bending stress - conductor construction 19 wires:

item no.	type	dimension	max. core-ø mm	outer-ø ± 10% mm	copper figure kg/km	cable weight ≈ kg/km	ohmic resistance at 20°C acc. to VDE 0812 max. Ω/km
06679001	S PN 667	2 x 2 x 22 AWG	1,55	6,5	33,8	58	58,8

Other dimensions and colours are possible on request.

short assembling time
by „Fast Connect“
construction (7 wires)



Customized plug-and-play solutions from cable manufacturing to customized cable assembly from a single source